


## DIESEL GENERATOR SET

**Model: PDS-900T**

**Rate Power: 1000kVA/ 50Hz/ 3 phases**

### Applications:

Home, Buildings, Hospitals, Train station, Bank, Telecom, Mining, Military, Outdoor projects, etc.

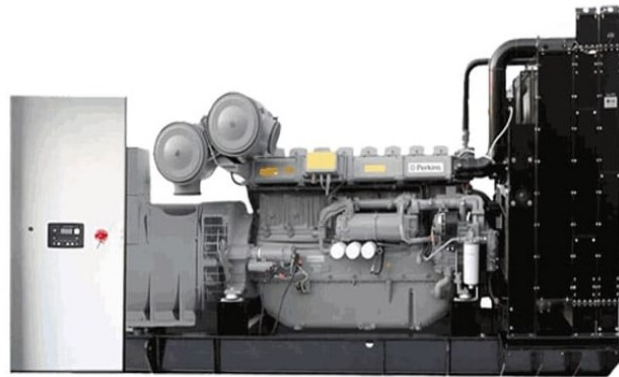

### Features and Benefits

- Tightly structure, excellent design and craft
- Excellent cooling system, reliable performance under the harshest conditions (ambient temperature up to 40°C and altitudes up to 1000m)
- Self-diagnostic capability simplifies troubleshooting
- LCD display shows system status setup information

### Color choices:



- Automatic voltage regulator protects your sensitive electronics from harmonic distortion and unstable power quality
- Soundproof type: Very quite running: 75±3dB(A) at 23ft(7m) at normal load.
- Enclosed muffler for added quietness
- Service and; maintenance accessible through easy-latch side service door

### Generator Data

Prime Power (kVA)	900
Standby Power (kVA)	1000
Rated Frequency (Hz)	50
Running Noise db(A)/7m (Silent type)	75±3
Battery capacity (V-Ah)	24V
Open Type-Dimension (LxWxH) (mm)	/
Open Type-Weight (kg)	/
Silent Type-Dimension (LxWxH) (mm)	Container 40
Silent Type-Weight (kg)	18650
Fuel Tank Capacity (L)	Running in 6 hours for full load

Continuous Running Time (hr.)

6

## Engine Specifications

### Main features:

### Brand: Perkins

- 8-cylinder, water-cooled, in-line diesel engine.
- Efficient fuel system for max power output and durability.
- Large-capacity air cleaner.
- Cost effective, fuel efficient and reliable performance.
- Functional engine with compact structure.
- Excellent after-sales service and sufficient spare parts supplying.
- Easy installation and ready access for routine maintenance

Model	4008TAG1A
Output Power (kw)	844
Cylinder No. & Config.	8, In-line
Type	4 cycle , Diesel
Displacement (liters)	30.561
Governor	Electrical Type
Engine System (r/min)	1500
Aspiration	Turbochaged
Fuel Consumption (L/h)	143
Oil Capacity (L)	153
Compression ratio	13.6:1

## Alternator specifications

### Main Features:

- Advanced automatic voltage regulator (AVR) control for trouble-free operation under the most demanding conditions.
- 2/3 pitch winding as standard, to avoid excessive neutral current.
- Single or two bearing construction with dynamically balanced rotor and sealed-for-life bearings.
- Easy access for installation and maintenance.
- IP23 as standard.
- Self-excited control system.
- Resist of corruption of oil and acid.

<b>Brand options:</b>	<b>Mecc-Atle/ Leroy Somer/ Benzen</b>
Model	/
Rated Power (kVA)	900kVA
Excitation System	Brushless, self-exciting
Connection Type	3 phases, 4 wires
Pole No	4
Regulator type	AVR
Protection class	IP23

## Control Panel System

### Options:



**DEEP SEA**



**DATAKOM**



**COMAP**

### Main Features:

- Using microprocessor as a core, graphics LCD with big screen and backlight, key touch for operation
- All parameters use digital modulation, with higher reliability and stability
- Built-in speed/frequency detecting units can accurately judge the states such as crank success and over speed
- Security password-protected programming levels
- Power supply range is wide, accommodating to different starting battery voltage environment
- Built-in watch dog can never be dead halt, ensuring smooth program execution
- Modular configuration design, inserted type connection terminals, flush type installation, compact structure, easy installation

### Precision measure and display of:

- ✓ Generator voltage
- ✓ Generator current
- ✓ Generator frequency
- ✓ Generator active power (kW)
- ✓ Generator inactive power (kW)
- ✓ Generator apparent power (kVA)
- ✓ Generator power factor
- ✓ Generator starts count
- ✓ Generator hour count
- ✓ Cumulate electric energy (kWh)
- ✓ Generator temperature
- ✓ Generator pressure

### Protection:

- ✓ Emergency stop
- ✓ High water temperature
- ✓ Low oil pressure
- ✓ Over speed
- ✓ Under speed
- ✓ Loss of speed signal
- ✓ Generator over frequency
- ✓ Generator under frequency
- ✓ Generator over voltage
- ✓ Generator under voltage
- ✓ Generator over current
- ✓ Fail to start

✓ Start battery voltage

✓ Auxiliary inputs

\* Reserves the right to change the specifications and designs without notice.

BENZÉN POWER