


## DIESEL GENERATOR SET

**Model: CD-1650KT**

**Rate Power: 1500kVA/ 50Hz/ 3 phases**

### Applications:

Home, Buildings, Hospitals, Train station, Bank, Telecom, Mining, Military, Outdoor projects, etc.

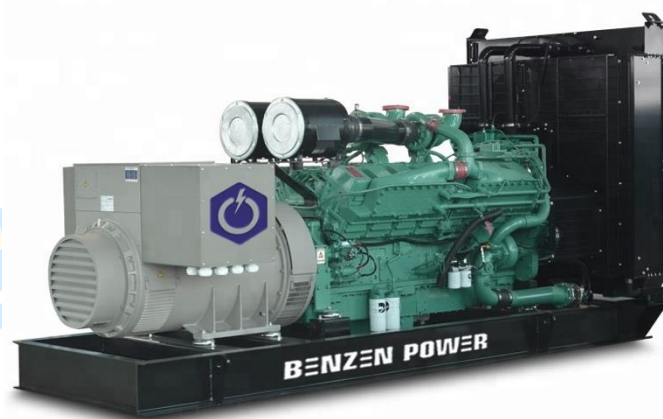

Color choices:



### Features and Benefits

- Tightly structure, excellent design and craft
- Excellent cooling system, reliable performance under the harshest conditions (ambient temperature up to 40°C and altitudes up to 1000m)
- Self-diagnostic capability simplifies troubleshooting
- LCD display shows system status setup information
- Automatic voltage regulator protects your sensitive electronics from harmonic distortion and unstable power quality
- Open type: Very quite running: 92±3dB(A) at 23ft(7m) at normal load.
- Enclosed muffler for added quietness
- Service and; maintenance accessible through easy-latch side service door

### Generator Data

|                                      |                |
|--------------------------------------|----------------|
| Prime Power (kVA)                    | 1500           |
| Standby Power (kVA)                  | 1650           |
| Rated Frequency (Hz)                 | 50             |
| Running Noise db(A)/7m (Silent type) | 92±3           |
| Vltage (V)                           | 230/380        |
| Curent (A)                           | 2300           |
| No.Phase                             | 3              |
| Open Type-Dimension (LxWxH) (mm)     | 5050*2150*2480 |
| Open Type-Weight (kg)                | 9950           |
| Fuel Tank Capacity (L)               | Option         |
| Fuel                                 | Diesel         |

## Engine Specifications

### Main features:

#### Brand: Cummins

- 16-cylinder, water-cooled, 60 Degree Vee, diesel engine.
- Efficient fuel system for max power output and durability.
- Large-capacity air cleaner.
- Cost effective, fuel efficient and reliable performance.
- Functional engine with compact structure.
- Excellent after-sales service and sufficient spare parts supplying.
- Easy installation and ready access for routine maintenance

|                        |  |
|------------------------|--|
| Model                  | KTA50-GS8                                    |
| Output Power (kw)      | 1429   |
| Cylinder No. & Config. | V16, 60 degree Vee                           |
| Type                   | 4 cycle, Diesel                              |
| Displacement (liters)  | 50.3   |
| Governor               | Electrical type                              |
| Engine System (r/min)  | 1500   |
| Air intake system      | Turbocharged and Low Temperature Aftercooled |
| Fuel Consumption (L/h) | 238  |
| Oil Capacity (L)       | 204  |
| Bore x Stroke (mm)     | 159x159                                      |

## Alternator specifications

### Main Features:

- Advanced automatic voltage regulator (AVR) control for trouble-free operation under the most demanding conditions.
- 2/3 pitch winding as standard, to avoid excessive neutral current.
- Single or two bearing construction with dynamically balanced rotor and sealed-for-life bearings.
- Easy access for installation and maintenance.
- IP23 as standard.
- Self-excited control system.
- Resist of corrosion of oil and acid.

|  |                          |
|--|--------------------------|
| <b>Brand options:</b> Mecc-Atle/ Leroy Somer/ Benzen |                          |
| Model  | /                        |
| Rated Power (kVA)                                    | 1500                     |
| Excitation System                                    | Brushless, self-exciting |
| Connection Type                                      | 3 phases, 4 wires        |
| Pole No  | 4                        |
| Regulator type                                       | AVR                      |
| Protection class                                     | IP23                     |
| Insulation class                                     | H                        |

## Control Panel System

### Options:



DEEP SEA



DATAKOM



COMAP

### Main Features:

- Using microprocessor as a core, graphics LCD with big screen and backlight, key touch for operation
- All parameters use digital modulation, with higher reliability and stability
- Built-in speed/frequency detecting units can accurately judge the states such as crank success and over speed
- Security password-protected programming levels
- Power supply range is wide, accommodating to different starting battery voltage environment
- Built-in watch dog can never be dead halt, ensuring smooth program execution
- Modular configuration design, inserted type connection terminals, flush type installation, compact structure, easy installation

### Precision measure and display of:

- ✓ Generator voltage
- ✓ Generator current
- ✓ Generator frequency
- ✓ Generator active power (kW)
- ✓ Generator inactive power (kW)
- ✓ Generator apparent power (kVA)
- ✓ Generator power factor
- ✓ Generator starts count
- ✓ Generator hour count
- ✓ Cumulate electric energy (kWh)
- ✓ Generator temperature
- ✓ Generator pressure
- ✓ Start battery voltage

### Protection:

- ✓ Emergency stop
- ✓ High water temperature
- ✓ Low oil pressure
- ✓ Over speed
- ✓ Under speed
- ✓ Loss of speed signal
- ✓ Generator over frequency
- ✓ Generator under frequency
- ✓ Generator over voltage
- ✓ Generator under voltage
- ✓ Generator over current
- ✓ Fail to start
- ✓ Auxiliary inputs

\* Reserves the right to change the specifications and designs without notice.