

发电系列 Power series


ISUZU

五十铃 4JB1 系列

ISUZU 4JB1 series

◎产品特点：体积小、噪音低、可靠性高、维修简便、维护成本低。

◎Product features: Small volume, low noise, high reliability, easy maintenance, low maintenance cost.

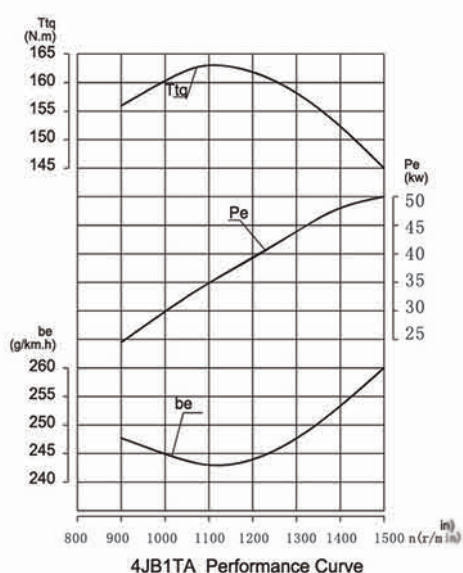

ISUZU | 4JB1 | 4JB1T | 4JB1TA | For 40kVA|50kVA|38kVAgenerator

Model	4JB1	4JB1T	4JB1TA
Type	Four cylinder, in lined, water cooled, four stroke, directed injection	Four cylinder, in lined, water cooled, four stroke directed injection, turbocharged	
Bore×stroke(mm)	93×102		
Displacement(L)	2.771		
Compression ratio	18.2		
Rated power/Rated speed(KW/r/min)	23.2/1500 27/1800	28.5/1500 32/1800	36/1500 41/1800
The lowest stable speed at zero load(r/min)	≤850		
Lubricating system	Pressure splashed		
Starting type	Electric starter		
Rotation direction(face to the flywheel)	Anticlockwise		
Fuel type	0#, -10#, -20#		
Fuel consumption rate/rotation speed[(g/kw.h)/r/min]	227/1500		221/1500
Lube oil type	CDGrade or SAE 10W-30, 15W-40		
Lube oil capacity(L)	8.5		
Cooling water capacity(L)	10		
Starting motor capacity(V.kw)	12V 2.8KW		
Charging generator capacity(V.A)	12V 50A		
Accumulator capacity(V.Ah)	12V 120Ah		
Overall dimension(L×W×H)(mm)	870×667×790		883×667×913
Dry weight(kg)	230		240